

EuropeLIFT

optimize reaching

STRENX[™]
PERFORMANCE STEEL




TM13T

- Working height: 13 m
- Horizontal Outreach 9 m (80kg)
- Straight telescopic boom with, and platform rotator
- Gradeability 6,8°(12%)
- Min. weight with wheel assist 1460 kg
- Compact transport dimensions




TRAILER-MOUNTED BOOMLIFT

Technical data	TM 13T
Working Height	13 m
Platform Height	11 m
Horizontal Reach (220kg)	7 m
Horizontal Reach (100kg)	9 m
Platform Capacity	220 kg
Slewing	365°
Platform dimensions	1,4x0,7x1,1 m
Platform rotator	2x45°
Transport length	5,95 m
Transport width	1,58 m
Transport height	1,99 m
Total weight: (230V, wheel assist)	ca. 1460 kg
Total weight (230V, Honda, wheel assist)	ca. 1495 kg
Total weight (battery 24VDC, wheel assist)	ca. 1580 kg
Outrigger footprint Outrigger plate outer edge	ca. 3,72 m
Gradeability	6,8° (12%)
Max. towing speed	80 km/h
Brake	Overrun Brakes with Gas Spring
Tyres	195 R 14 C

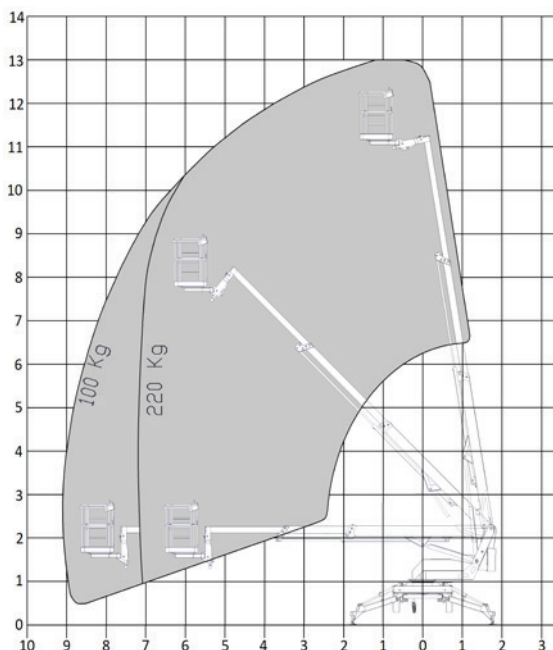

EuropeLIFT

TYP: *TM13T*

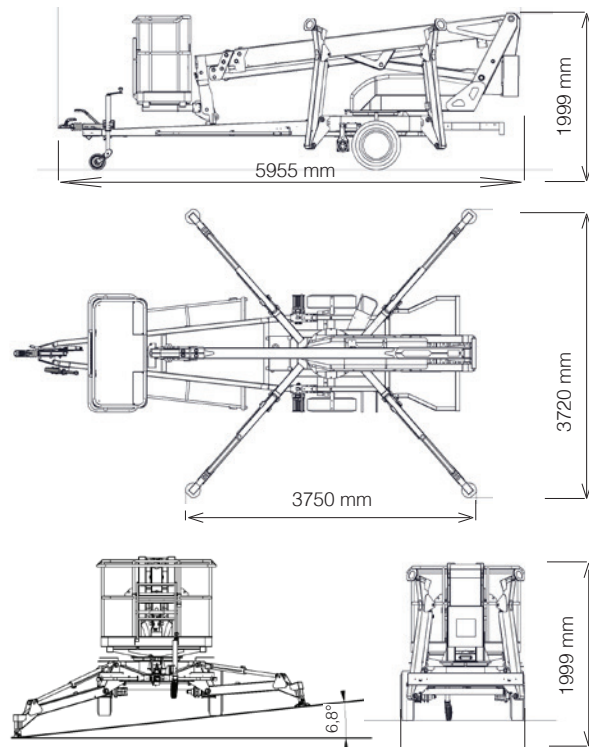

STANDARD FEATURES

- Straight telescopic boom with moment control system
- 230V AC power source
- Wheel assist
- Autoplatform leveling with auto correction at 3°
- Chassis level sensor 1,5°
- Alu basket with wide tool tray, safety handrail and dual harness points
- Proportional electro-hydraulic controls by fingertip joysticks
- Ground pressure sensors on all outrigger plates with audible and visible alarms
- 230V outlet in the basket
- Hourmeter
- CE cert and EU road typ approval
- Ground and upper controls with tarp cover
- Manual recovery with hand pump
- Automatic reverse and overrun brakes
- Colour of the machine: RAL3002 (red)

OPTIONS

- Auto classic level
- Dual power source 230V & Honda
- Battery power 24V 225 Ah
- Custom colour
- G.R.P. basket with tool tray (2 person)
- Outrigger plate pads

EuropeLIFT

Adresse: H-8992 Bagod, Gépállomás u. 9.

Tel: +36 20 9474 767

Internet: info@europelift.com | www.europelift.com

INSTANT
NORGE AS

Distributed by

Deliveien 7

NO 1540 Vestby

+47 23 19 11 00